

ABCD Status

- A - Stock item generically marked.
- B - Locally marked in house.
- C - Factory manufactured and marked.
- D - Price and delivery on application (long lead item).

This rugged, economical, flat metal indicative seal features a hook-lock mechanism that locks securely with one simple motion, once engaged it is easily verifiable for positive closure. Supplied rolled edge as standard.



Seal applications

- Rail Cars
- Hopper cars
- Tankers/trucks
- Containers
- Tank cars
- Trailer doors

Features

- Single motion closure action.
- Easy to verify as "closed"
- Removed with suitable cutters.

Materials

Made of tin-plated steel.

Strength Characteristics

Type of Seal	Seal Classification	Actual tensile strength	ISO17712 Pass kN
Guard Lock (S92T)	I (Indicative)	.444kN (100lbf)	Less than <2.7kN
1kN = 225lbf			

Marking


- Cold stamped marking with two lines of up to 17 characters and 5-10 digits.
- Standard: Embossed.
- Optional: Ink Jet marking available with two lines of up to 10 characters and 10 digits.

Colours

Tin plate/zinc finish. Stamped "TBE" & numbered

Packing

- 1,000 seals per box bundled sequentially in 100's.
- Carton size: 30cm x 24cm 90cm
- Carton weight: 4.7kg net / 5kg gross

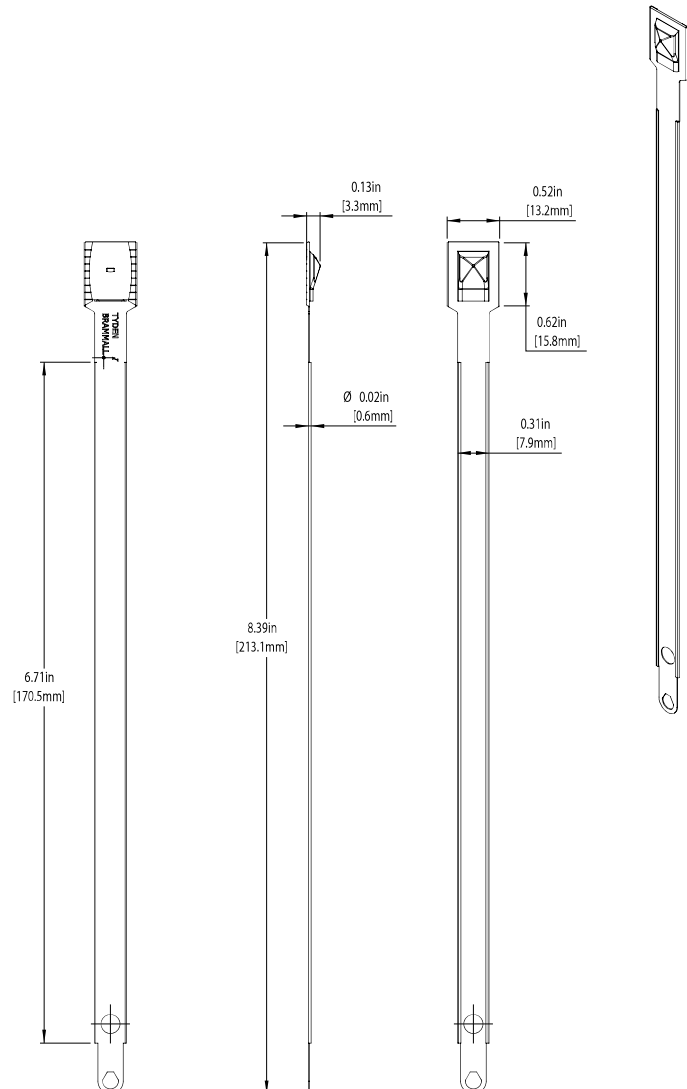

Guard Lock Strap Seal

032*11_Guard Lock